


Device Onboarding – Windows (Wi-Fi)

1. Connect to the **CCL-Connect** wireless network.

Enter your **CCL network username** and **password**, then press **OK**.

i If you do not know your password, you can reset it using the CCL password portal <https://password.ccl.com.au>, or you can contact CCL support by telephone 9221 6235 or email support@ccl.com.au.

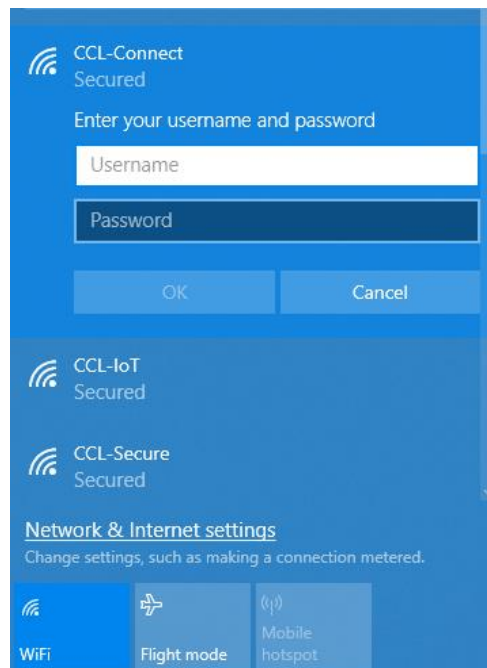

2. Open a web browser and type **login.ccl.com.au** in the address bar.


You will be redirected to the onboarding screen **BYOD Portal**. (This may happen automatically on some devices).

After reviewing the CCL Network Acceptable Use Policy, click **Start**.



3. Enter a **Device name** and press **Continue**.


The description field is optional.

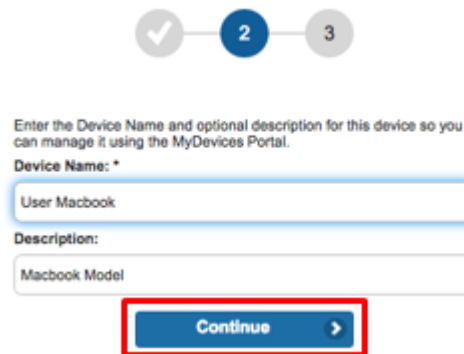

The screenshot shows a registration form with a progress indicator at the top showing steps 1, 2, and 3. Step 2 is active. The form asks for a 'Device Name' (with a red asterisk) and an optional 'Description'. The 'Device Name' field contains 'User Macbook' and the 'Description' field contains 'Macbook Model'. A blue 'Continue' button with a right-pointing arrow is highlighted with a red box.


4. Click **Save** or **Run** when prompted to download or open the setup file.

The setup file will start downloading.

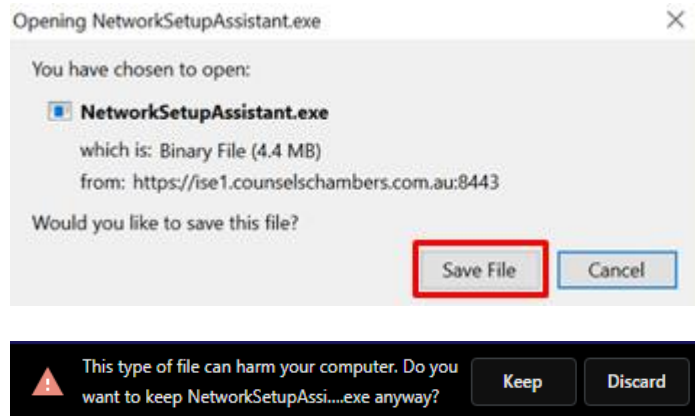


5. You will receive an alert from Windows stating "SmartScreen can't be reached at the moment".

Ignore this and click **Run**.

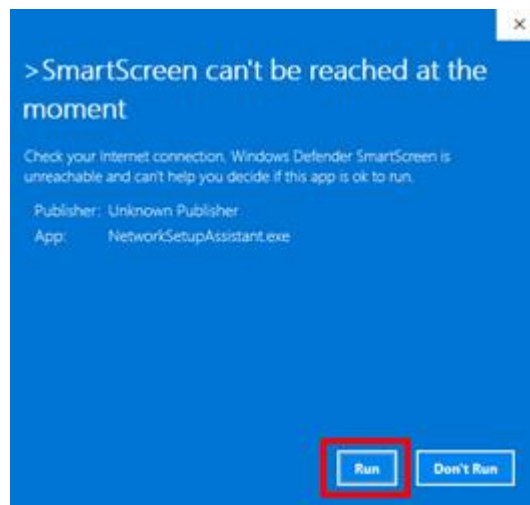


6. Open the setup file and click **Start** to initiate the onboarding process.

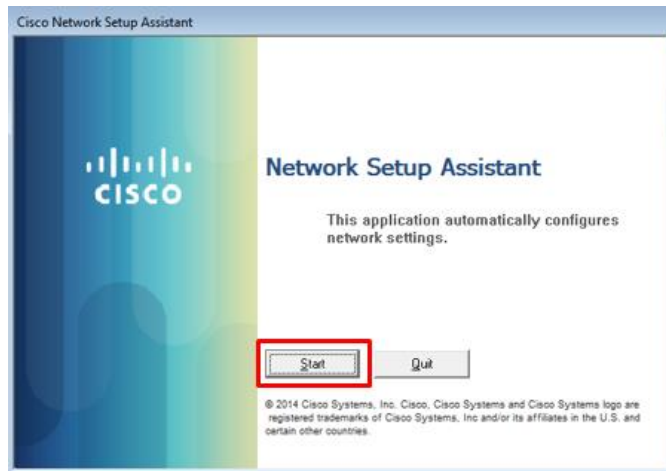


3. The Cisco Network Setup Assistant will ask for a "Network Password". This is your CCL Network Password.

Enter your password and click **Ok**.

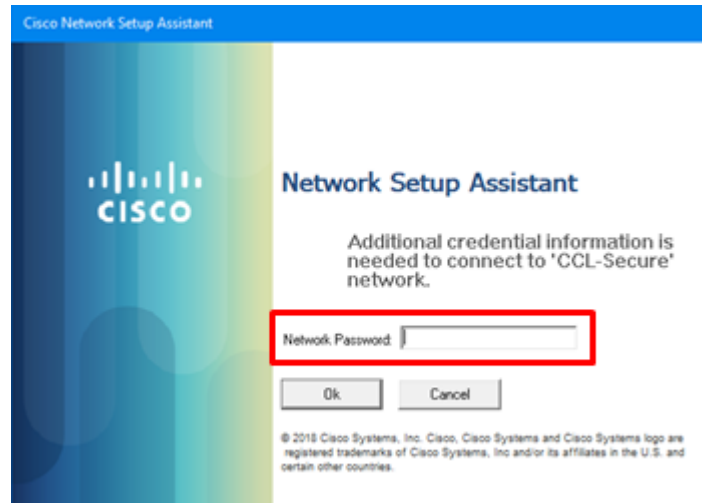

4. Click **Yes** when prompted to install a security certificate.

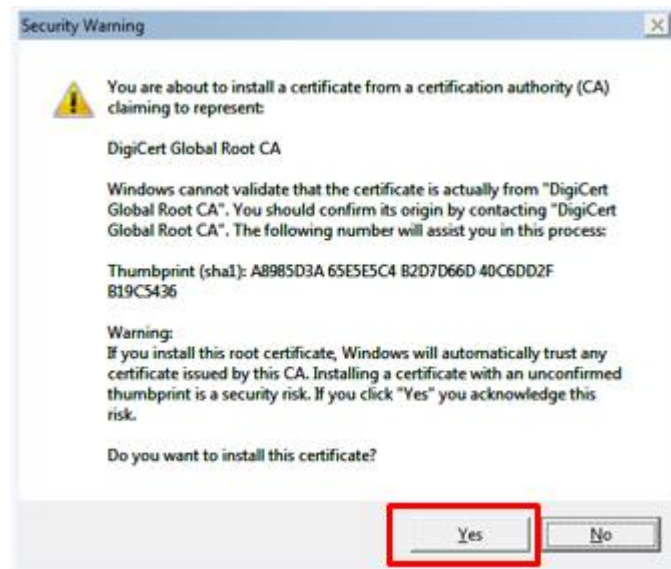


5. If the onboarding was successful you will see a green tick, and you can proceed to the next step.

If you receive an error please contact CCN support:

Phone: 0292216235

Email: support@ccl.com.au

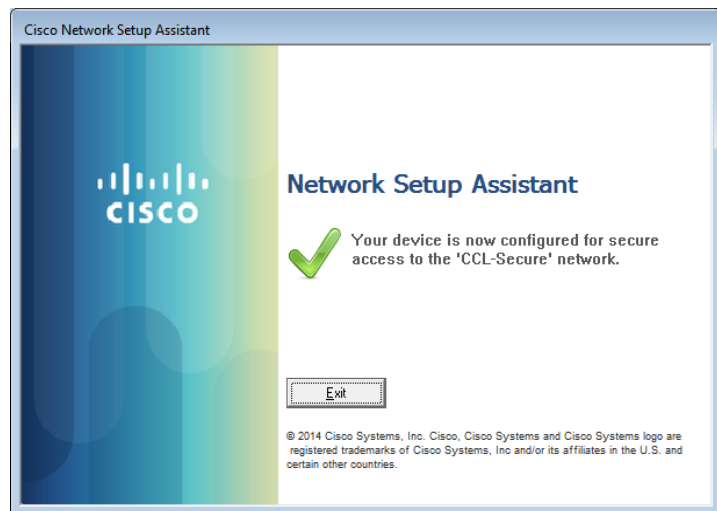

6. Your device will connect automatically to CCL-Secure.

Once connected, right-click CCL-Connect and click **Forget**.

